

Indoor Ambience Monitoring Sensor AM100 Series (AM103 & AM103L)

Milesight



AM103 is a compact indoor ambience monitoring sensor for measurement of temperature, humidity and CO₂. These data will be shown on the E-ink screen in real-time, which allow to quantify the indoor environment and comfort. AM103 is widely used for office, store, classroom, hospital, etc.

Apart from screen display, sensor data can also be transmitted using LoRaWAN[®]. With this low-power technology, AM103 can work for more than 3 years with 2 replaceable batteries. Combining with Milesight LoRaWAN[®] gateway and Milesight IoT Cloud solution, users can manage all sensor data remotely and visually.

◆ Features

- Integrated with multiple sensors like humidity, temperature and CO₂
- Visual data and clear emoticon to understand the comfort level easily via E-ink screen
- Equipped with traffic light indicator to indicate multi-level CO₂ threshold alarms
- More than 3 years work without replacing batteries
- Built-in NFC for easy configuration
- Compliant with standard LoRaWAN[®] gateways and network servers
- Quick and easy management with Milesight IoT Cloud solution

◆ Specifications

Wireless Transmission

Technology	LoRaWAN®
Frequency	CN470/IN865/RU864/EU868/US915/AU915/KR920/AS923-1&2&3&4
Tx Power	16 dBm (868 MHz)/22 dBm (915 MHz)/19 dBm (470 MHz)
Sensitivity	-137dBm @300bps
Mode	OTAA/ABP Class A

Sensors

Temperature

Range	-20°C to + 70°C
Accuracy	0°C to + 70°C (+/- 0.3°C), -20°C to 0°C (+/- 0.6°C)
Resolution	0.1°C

Humidity

Range	0% to 100% RH
Accuracy	10% to 90% RH (± 3%), below 10% and above 90% RH (± 5%)
Resolution	0.5% RH

Carbon Dioxide (CO₂)

Range	400 to 5000 ppm
Accuracy	± (30 ppm + 3 % of reading)
Resolution	1 ppm

Display & Configuration

Display	AM103: 2.13-inch Black & White E-Ink Screen AM103L: Not Support
Button	1 × Power Button
LED	1 × Traffic Light Status Indicator
Configuration	Mobile App via NFC


Physical Characteristics

Power Supply	2 × 2700 mAh ER14505 Li-SOCl ₂ Replaceable Batteries
Battery Life ¹ (10 min interval)	AM103: Around 3 Years AM103L: Around 4 Years
Operating Temperature	-20°C to +60°C (E-Ink Screen: 0°C - 40°C)
Relative Humidity	0% to 95% (non-condensing)
Ingress Protection	IP30

¹ Test under laboratory conditions and for guideline purposes only.

Dimension	68 × 65 × 20.5 mm (2.68 × 2.56 × 0.81 in)
Installation	Wall Mounting

◆ Dimensions(mm)

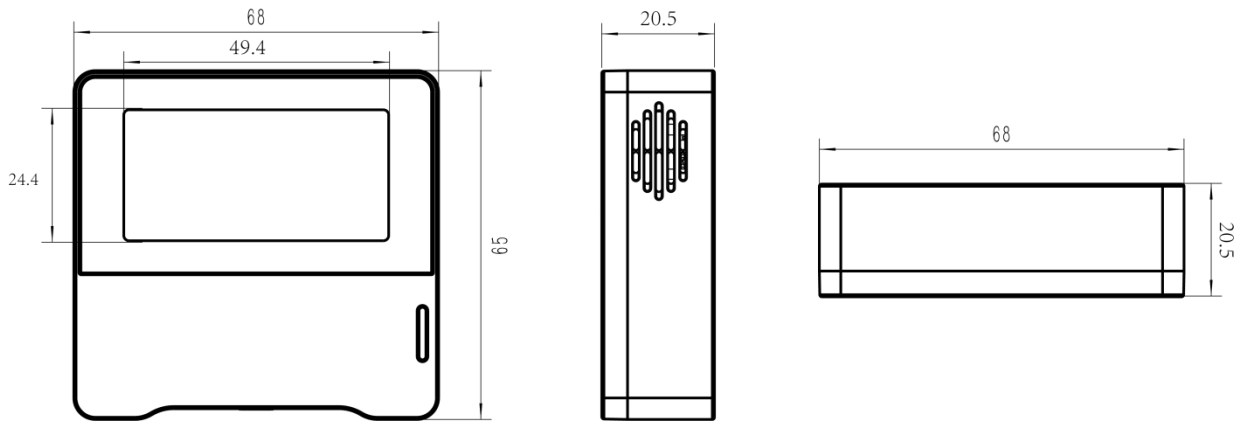

Rémy GUÉDOT

Gsm: +33 (0) 662 80 65 57
guedot@rg2i.fr

Olivier BENAS

Gsm: +33 (0) 666 84 26 26
olivier.benas@rg2i.fr

ATTENTION - NOUVELLE ADRESSE

14 rue Edouard Petit - F42000 Saint Etienne
Tél: +33 (0) 477 92 03 56 - Fax: +33 (0) 477 92 03 57

www.rg2i.fr

