

Fujitsu RAC and VRF systems to Modbus RTU Interface (to remote controller)

Item number: INMBSFGL001R000

The Fujitsu-Modbus interface allows full bidirectional communication between Fujitsu RAC and VRF systems and Modbus RTU (RS-485) networks. The interface acts as a server device for the installation, accessing all signals from the air conditioner unit. A wired remote controller can also be part of the network.



Fujitsu to Modbus - 1 indoor unit

Features and benefits

- ✓ **Modbus RTU (EIA-485) server device**
The interface acts as a Modbus server device through its Modbus RTU (EIA-485 connector) port.
- ✓ **Energy savings through a window contact function**
This function helps minimize costs, as HVAC systems are a major building energy consumer.
- ✓ **AC unit control by both the remote and Modbus RTU**
The AC unit can be simultaneously controlled by the manufacturer's remote controller and Modbus RTU.
- ✓ **Multiple mounting options**
Mounting options include DIN rail, wall, or, in some AC models, even inside the indoor unit.
- ✓ **Dual configuration options**
Configuration is carried out through the interface's onboard DIP switches and the Modbus interface.
- ✓ **Total unit control and monitoring from Modbus RTU**
Through internal variables, running hours counter (for maintenance purposes), and error indication.
- ✓ **No external power required**
The interface is powered directly from the AC unit, so no external power supply is required.

Fujitsu RAC and VRF systems to Modbus RTU Interface (to remote controller)



| General | |
|------------------------------|--|
| Net Width (mm) | 53 |
| Net Height (mm) | 58 |
| Net Depth (mm) | 93 |
| Net Weight (g) | 95 |
| Packed Width (mm) | 140 |
| Packed Height (mm) | 86 |
| Packed Depth (mm) | 110 |
| Packed Weight (g) | 188 |
| Operating Temperature °C Min | -25 |
| Operating Temperature °C Max | 60 |
| Storage Temperature °C Min | -40 |
| Storage Temperature °C Max | 85 |
| Power Consumption (W) | 0.72 |
| Input Voltage (V) | 12 VDC |
| Power Connector | 3-pole |
| Configuration | ETS |
| Capacity | 1 Indoor unit. |
| Installation Conditions | This gateway is designed to be mounted inside an enclosure. If the unit is mounted outside an enclosure, precautions should always be taken to prevent electrostatic discharge to the unit. When working inside an enclosure (e.g., making adjustments, setting switches, etc.), typical anti-static precautions should always be followed before touching the unit. |
| AC Model Compatibility | Fujitsu RAC and VRF systems |

Fujitsu RAC and VRF systems to Modbus RTU Interface (to remote controller)



General

| | |
|----------------------------|---|
| Content of Delivery | Intesis gateway and installation manual. |
| Mounting | DIN rail mount (bracket included), Wall mount |
| Housing Materials | Plastic |
| Warranty (years) | 3 years |
| Packaging Material | Cardboard |

Identification and Status

| | |
|--|-----------------|
| Product ID | INMBSFGL001R000 |
| Country of Origin | Spain |
| HS Code | 8517620000 |
| Dual Usage | No |
| Export Control Classification Number (ECCN) | EAR99 |

Physical Features

| | |
|------------------------------------|--|
| Connectors / Input / Output | EIA-485, HVAC port. |
| LED Indicators | Gateway and communication status. |
| DIP & Rotary Switches | EIA-485 serial port configuration. Gateway settings. |
| Contains Battery | No |

Certifications and Standards

| | |
|----------------------------|----------|
| ETIM Classification | EC001604 |
| CE | Yes |
| CB | Yes |
| UKPSTI | Yes |
| UL | Yes |

Fujitsu RAC and VRF systems to Modbus RTU Interface (to remote controller)



Certifications and Standards


WEEE Category

IT and telecommunications equipment

Fujitsu RAC and VRF systems to Modbus RTU Interface (to remote controller)



Use Case

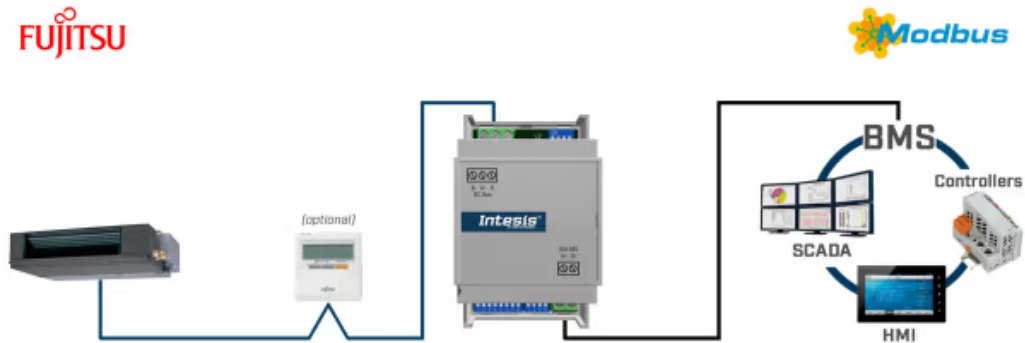

Integration example.